

Cisco 3800 Series ATM OC-3 Network Module

Cisco Systems® extends WAN connectivity by adding high-speed ATM access to remote branch offices with the Cisco® 3800 ATM OC-3 Network Module.


OVERVIEW

A 155-Mbps ATM OC-3 network module is available on the Cisco 3825 and 3845 integrated services routers, starting with Cisco IOS® Software Release 12.4(3) Mainline (Figure 1). The network module supports the ATM forum standard ATM Adaptation Layer 5 (AAL5) with the following ATM quality of service (QoS) traffic classes: unspecified bit rate (UBR), UBR+, real-time variable bit rate (VBR-rt), non-real-time VBR (VBR-nrt), available bit rate (ABR), and constant bit rate (CBR). Voice over IP (VoIP) and H.323 over ATM is supported over the WAN using the currently available onboard voice digital signal processors (DSPs), analog voice and fax network modules, and voice interface cards.

The network module has modular optics supporting the Cisco pluggable optical modules (POMs) and Cisco Small Form-Factor Pluggables (SFPs), simplifying the selection of network modules from six offerings to one. The SFPs support STM-1 framing standards over multimode, single-mode intermediate-reach, and single-mode long-reach fiber-optic interfaces. The module is a single-port module with LC-type connector. The single-mode SFPs combined with the ATM network module provide high-speed trunking for users with access to a fiber WAN, whereas multimode is ideal for connecting high-speed servers, switches, or hubs equipped with OC-3/STM-1 fiber connections.

Cisco IOS SP Services feature sets are required to support ATM. A maximum of one ATM OC-3 network module is recommended on the Cisco 3825, and a maximum of two ATM OC-3 network modules are recommended on the Cisco 3845.

Figure 1. Cisco 3800 Series ATM OC-3 Network Module

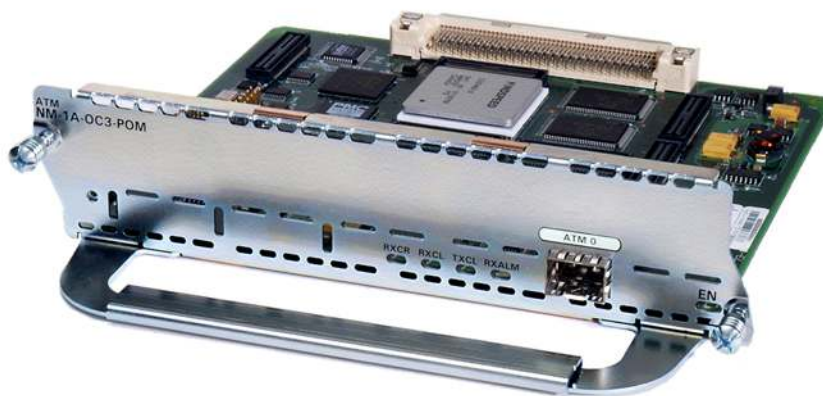

PRODUCT SUMMARY

The Network module supports three different SFPs, each with a different physical interface, support OC-3c/STM-1 multimode, OC-3c/STM-1 single-mode intermediate-reach, and OC-3c/STM-1 single-mode long-reach modes, however the module supports ATM OC-3 only. Table 1 lists the SFPs supported on the new network module.

Table 1. ATM OC-3 Network Module and Supported POMs and SFPs

| Product Number | Product Description |
|----------------|---|
| NM-1A-OC3-POM | ATM OC3 module with single POM (SFP) slot |
| SFP-OC3-MM | OC3/STM1 SFP, Multi-mode fiber |
| SFP-OC3-IR1 | OC3/STM1 SFP, Single-mode fiber, Intermediate Reach |
| SFP-OC3-LR1 | OC3/STM1 SFP, Single-mode fiber, Long Reach (40km) |

For more information on SFP's, go to:

http://www.cisco.com/en/US/prod/collateral/modules/ps5455/ps6579/product_data_sheet0900aecd80285547.html

NEW FEATURES

New features of the new network modules follow:

- RFC 1577 support for routing over ATM
- RFC 1483 support for multiple encapsulations over ATM
- ATM Forum User-Network Interface (UNI) 3.0, 3.1, and 4.0
- ATM permanent virtual circuits (PVCs) and switched virtual circuits (SVCs)
- LAN Emulation (LANE) 2.0
- Layer 2 per-VC queuing
- Up to 1024 simultaneous virtual circuits
- AAL5 ATM adaptation layer
- ATM service classes: UBR, UBR+, VBR-rt, VBR-nrt, ABR, and CBR (data only)
- Permanent virtual paths (PVPs)
- ATM bandwidth (resource) manager
- Multiprotocol over ATM (MPOA) client and server
- Multiprotocol Label Switching (MPLS)
- IETF Point-to-Point Protocol (PPP) over ATM
- Next Hop Resolution Protocol (NHRP)
- F4 and F5 operations and management (operation, administration, and maintenance [OAM]) cell support
- Interim Local Management Interface (ILMI)

SYSTEM REQUIREMENTS

- The new network module is supported on the Cisco 3825 and the Cisco 3845.
- SP Services feature sets of Cisco IOS Software Release 12.4(3) Mainline or above and 12.4(4)T or above are required.
- A maximum of one ATM OC-3 network module is supported on the Cisco 3825; the maximum for the Cisco 3845 is two.
- The system requires no additional flash or DRAM memory other than the Cisco IOS Software Release 12.4(3) Mainline and 12.4(4)T feature set specified minimum memory requirements.
- No slot dependent.

Table 2 gives support and orderability information for Cisco IOS Software.

Table 2. Cisco IOS Software Support and Orderability Rules

| Product | Cisco IOS Software Version Required | Cisco IOS Feature Sets Required | Minimum DRAM Memory | Maximum Supported |
|--|-------------------------------------|---------------------------------|--|-------------------|
| Cisco 2600 Series, Including Cisco 2610, 2611, 2620, 2621, 2650, 2651, and 2691 Multiservice Platforms and Cisco 2610XM, 2611XM, 2620XM, 2621XM, 2650XM, and 2651XM Multiservice Routers | Not supported | - | - | - |
| Cisco 2800 Series, Including Cisco 2801, 2811, 2821, and 2851 | Not supported | - | - | - |
| Cisco 3600 Series, Including Cisco 3620, 3640, and 3660 Multiservice Platforms | Not supported | - | - | - |
| Cisco 3700 Series, Including Cisco 3725 and 3745 Multiservice Access Routers | Not supported | - | - | - |
| Cisco 3825 Integrated Services Router | 12.4(3) Mainline and 12.4(4)T | SP Services | Same as 12.4(3) Mainline and 12.4(4)T Cisco IOS SP Services feature sets DRAM minimum memory requirements. | 1 |
| Cisco 3845 Integrated Services Router | 12.4(3) Mainline and 12.4(4)T | SP Services | Same as 12.4(3) Mainline and 12.4(4)T Cisco IOS SP Services feature sets DRAM minimum memory requirements. | 2 |

Note: OC-3 ATM network modules are not supported in IP Base, IP Voice, Enterprise Base, and Advanced Security Feature Sets. ATM is supported in Advanced Services, Enterprise Services, and Advanced Enterprise Services feature sets.

Table 3 gives ATM service category definitions, and Table 4 lists their attributes and guarantees.

Table 3. ATM Service Category Definitions

| ATM Service Categories | Typical Use |
|------------------------|--|
| UBR | Best-effort service intended for non-real-time bursty applications that do not require a guarantee of traffic characteristics such as bandwidth, cell delay, and cell delay variation. |
| UBR+ | Provides a guaranteed frame rate (GFR) service with single leaky bucket algorithm; provides the ability to reserve UBR bandwidth minimum, or specify bandwidth maximum; similar to VBR in that it increases the minimum cell rate (MCR) when cell rate falls below the MCR. |
| VBR-rt and VBR-nrt | Intended for applications that have bursty traffic patterns but require a guarantee of some traffic parameters; a peak cell rate (PCR), sustained cell rate (SCR), and maximum burst size (MBS) can specify traffic parameters. |
| ABR | Employed to maximize bandwidth use of the ATM link by using congestion feedback notification (resource management cells); both PCR and MCR specify the ABR connection; the transmit rate of each connection is flow-controlled such that the rate is always between the user-specified values for a minimum and peak rate. |
| CBR | Intended for real-time applications such as Systems Network Architecture (SNA) traffic, voice, and video, which require a fixed bandwidth and low cell delay; CBR in initial release supports data only. |

Table 4. ATM Service Category Attributes and Guarantees

| Service Category | Traffic Description | Minimum Loss Cell Loss Ratio (CLR) | Delay Variance | Bandwidth | Use of Feedback Control |
|------------------|------------------------------------|------------------------------------|----------------|-----------|-------------------------|
| UBR | PCR | No | No | No | No |
| UBR+ | PCR | Yes | No | No | No |
| VBR-rt | PCR, SCR, and MBS | Yes | Yes | Yes | No |
| VBR-nrt | PCR, SCR, and MBS | Yes | No | Yes | No |
| ABR | PCR, MCR+, and behavior parameters | Yes | No | Yes | Yes |
| CBR | PCR | Yes | Yes | Yes | No |

Table 5 lists the ATM OC-3 LED's with their functions and color.

Table 5. ATM OC-3 Network Modules LED Description

| ATM OC-3 LEDs | Function | Color |
|---------------|--|--------|
| ENABLED | This LED indicates the ATM OC-3 network module has passed self-tests and is available to the router. | Green |
| RX CR | This LED indicates that a carrier signal is present. | Green |
| RX CL | This LED indicates that a cell was received. | Green |
| TX CL | This LED indicates that a cell was transmitted. | Green |
| RX ALM | This LED is an alarm indication signal. | Yellow |

OC-3 ATM PHYSICAL SPECIFICATIONS


Table 6 gives specifications for the Cisco 3800 Series ATM OC-3 Network Module.

Table 6. Product Specifications

| Feature | Description |
|--------------------------|---|
| Dimensions (H x W x D) | 1.6 x 7.10 x 7.2 in. (4.1 x 18.0 x 18.2 cm) |
| Weight | 2 lb maximum (1 kg maximum) |
| Environmental Conditions | Operating temperature: 32 to 104°F (0 to 40°C) Nonoperating temperature: -13 to 158°F (-25 to 70°C) |
| Relative Humidity | 5 to 95% |
| Protocols Supported | All in Cisco IOS Software Release 12.4(3) |
| Cabling | LC-type connector |
| Network Interfaces | Compatible with all existing network modules and WICS supported by Cisco 2600/2691/3600/3700/3800 routers |

| Feature | Description |
|-----------------------------|---|
| REGULATORY APPROVALS | |
| Product Safety | <ul style="list-style-type: none"> • UL 60950 (United States) • CSA C22.2, No. 60950 (Canada) • EN 60950 (European Union) • AS/NZS 60950 (Australia and New Zealand) • IEC 60950 (International) |
| Immunity | <ul style="list-style-type: none"> • EN300386 • EN55024/CISPR24 • EN50082-1 |
| Emissions | <ul style="list-style-type: none"> • ICES-003 Class A • EN55022 Class A • CISPR22 Class A • AS/NZS 3548 Class A • VCCI Class A • EN 300386 • EN61000-3-3 • EN61000-3-2 |
| Network Management | <p>The following MIBs are supported:</p> <ul style="list-style-type: none"> • ATM-MIB • CISCO-AAL5-MIB • CISCO-ATM-PVCTRAP-EXTN-MIB • CISCO-BUS-MIB • CISCO-IETF-ATM2-PVCTRAP-MIB • CISCO-IETF-ATM2-PVCTRAP-EXTN-MIB • CISCO-LECS-MIB • CISCO-LES-MIB • LAN -EMULATION-CLIENT-MIB • SONET-MIB • IF-MIB • ENTITY-MIB |

Figure 2. 155-Mbps ATM OC-3 Multimode Network Module

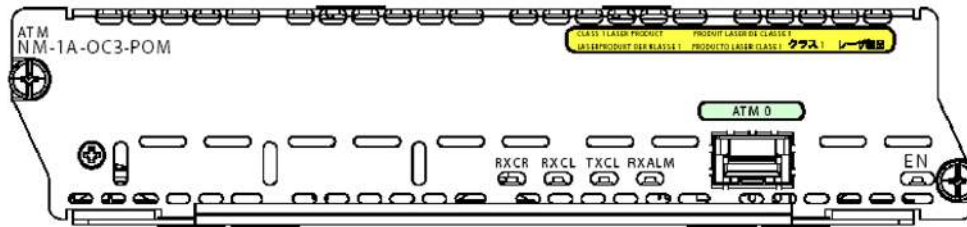

For more information on the **Cisco 3800 ATM OC-3 Network Module**, go to:

http://www.cisco.com/en/US/prod/collateral/routers/ps5855/prod_qas0900aecd80300030.shtml



Corporate Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters

Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: 31 0 20 357 1000
Fax: 31 0 20 357 1100

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-7660
Fax: 408 527-0883

Asia Pacific Headquarters

Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on **the Cisco Website at www.cisco.com/go/offices.**

- Argentina Australia Austria Belgium Brazil Bulgaria Canada Chile China PRC Colombia Costa Rica Croatia Cyprus Czech Republic Denmark Dubai, UAE Finland France Germany Greece Hong Kong SAR Hungary India Indonesia Ireland Israel Italy Japan Korea Luxembourg Malaysia Mexico The Netherlands New Zealand Norway Peru Philippines Poland Portugal Puerto Rico Romania Russia Saudi Arabia Scotland Singapore Slovakia Slovenia South Africa Spain Sweden Switzerland Taiwan Thailand Turkey Ukraine United Kingdom United States Venezuela Vietnam Zimbabwe

Copyright © 2005 Cisco Systems, Inc. All rights reserved. CCSP, CCVP, the Cisco Square Bridge logo, Follow Me Browsing, and StackWise are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, and iQuick Study are service marks of Cisco Systems, Inc.; and Access Registrar, Aironet, ASIST, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Empowering the Internet Generation, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, FormShare, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, LightStream, Linksys, MeetingPlace, MGX, the Networkers logo, Networking Academy, Network Registrar, Packet, PIX, Post-Routing, Pre-Routing, ProConnect, RateMUX, ScriptShare, SlideCast, SMARTnet, StrataView Plus, TeleRouter, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0502R) 205481.A_ETMG_CC_11.05

